DRAWING REGISTER & DESIGN BASIS

A ROOM, FROM INTENT TO BUILDABLE QUESTIONS.

A coordinated design-development set: shared geometry, dimensioned plans, interior elevations and casework interfaces. This study makes design decisions visible before detailed trade coordination.

SHEET	DELIVERABLE	SCALE
G000	Drawing register & design basis	NTS
A101	Dimensioned furniture plan	1:40
A102	Lighting & power coordination	1:40
A201	South interior elevation	1:30
A202	North interior elevation	1:30
J301	F05 sideboard - general arrangement	1:20
J401	F05 casework - section & interfaces	1:5
S001	Schedules, finishes & open decisions	NTS

ISSUE BASIS / S01

Internal room 6000 x 4800 x 2800 mm.

Wall thickness 150 mm is an assumed envelope.

All opening sizes and locations are design assumptions; survey before setting out.

Finish study: Bauhaus. Geometry is common to all style variants.

Elevation arrows reference interior views: south is east-left, north is west-left.

Door hinge and inward swing are proposed. Nominal 900 leaf is not a certified clear opening.

Trade release requires the specific decisions in S001 and hardware review in J401.

COORDINATION WORKFLOW

01 **CONFIRM**
Survey / dimensions

02 **COORDINATE**
Trades / equipment

03 **DETAIL**
Hardware / interfaces

04 **RELEASE**
Local professional review

DIMENSIONED FURNITURE PLAN

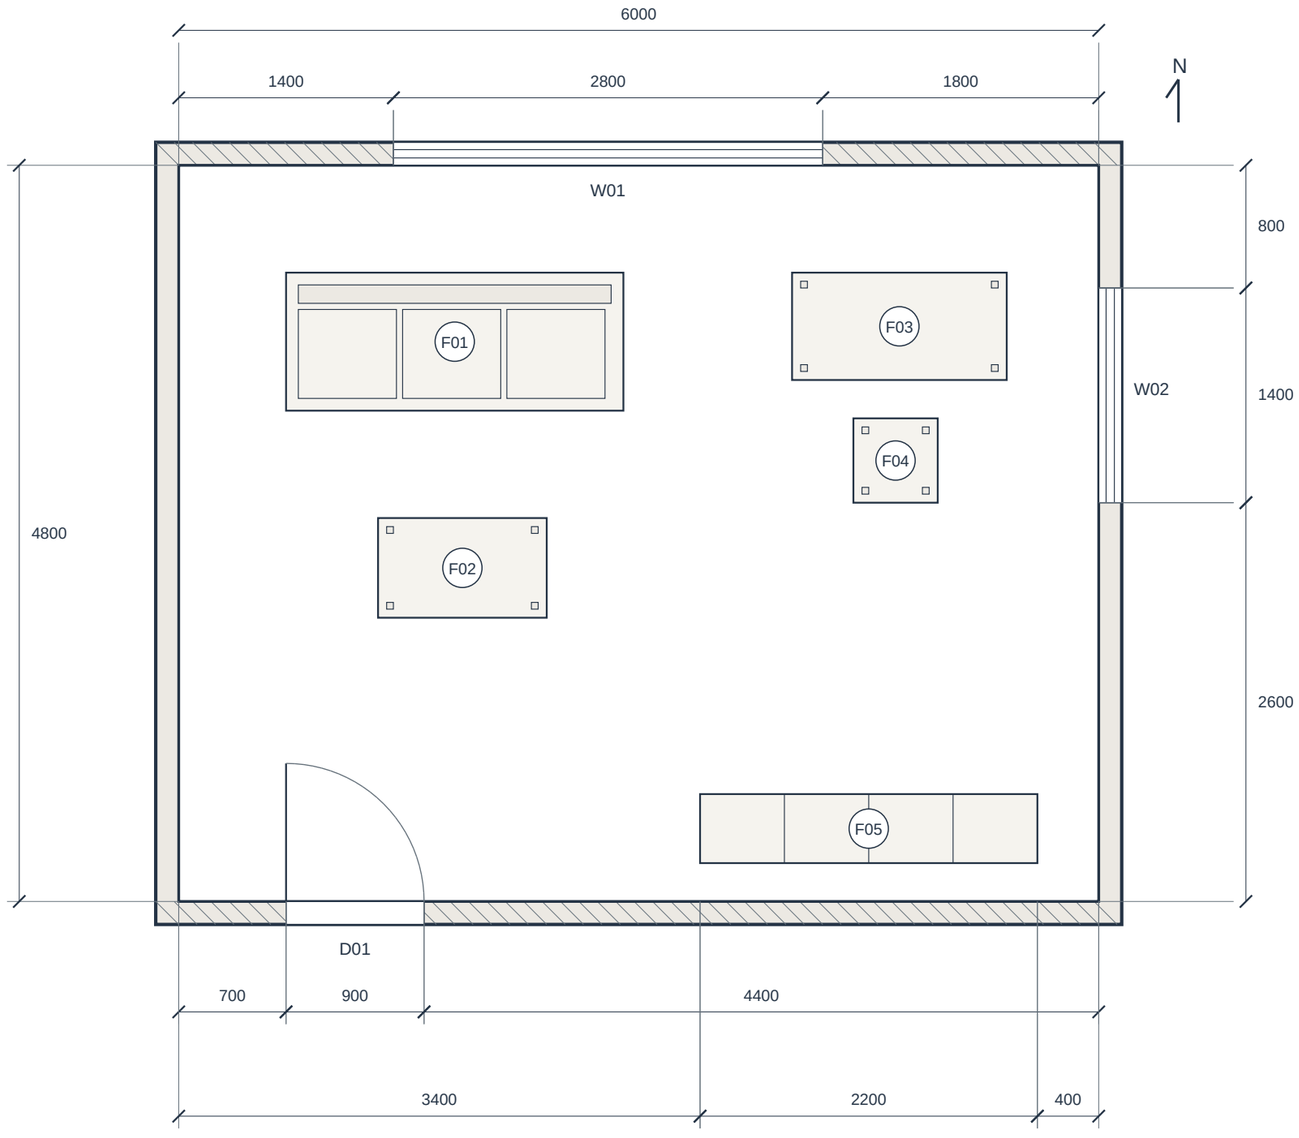

01 / PLAN 1:40 origin: internal SW corner; north up

Key: heavy line = cut wall; fine line = furniture; dashed arc = proposed door swing.

LAYOUT / SETTING-OUT

ID	WIDTH x DEPTH x HEIGHT
F01	2200 x 900 x 800
F02	1100 x 650 x 400
F03	1400 x 700 x 740
F04	550 x 550 x 820
F05	2200 x 450 x 750

F01 亞麻沙發 / Linen sofa
SW origin: X 700 / Y 3200

F02 茶几 / Coffee table
SW origin: X 1300 / Y 1850

F03 書桌 / Work desk
SW origin: X 4000 / Y 3400

F04 書椅 / Desk chair
SW origin: X 4400 / Y 2600

F05 訂製矮櫃 / Custom low sideboard
SW origin: X 3400 / Y 250

Furniture outlines are nominal envelopes. F05 is developed on J301/J401. No egress, accessibility or operational clearance approval is implied.

LIGHTING & POWER COORDINATION

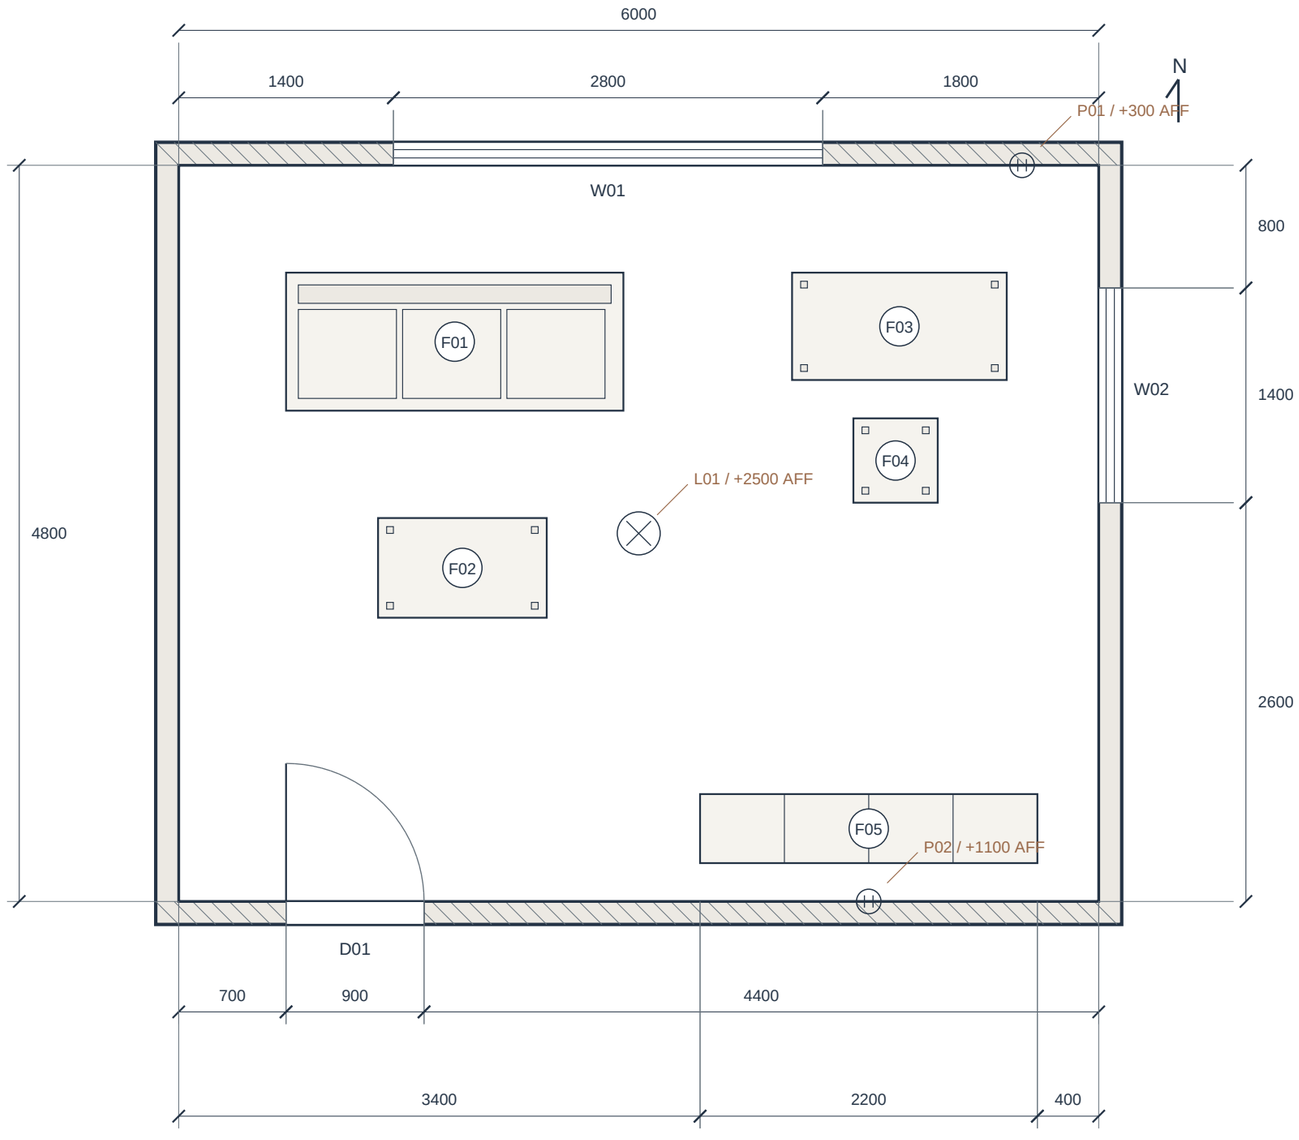

01 / PLAN 1:40 origin: internal SW corner; north up

SERVICE POINT PROPOSAL

ID	X / Y	AFF
L01	3000 / 2400	2500
P01	5500 / 4800	300
P02	4500 / 0	1100

AFF = above finished floor. XY positions reference inside SW corner.

L01: pendant design position. Ceiling anchor and suspension require product/substrate selection.

P01: desk power proposal at north wall; confirm plugs, cable paths and equipment access.

P02: power proposal above F05; coordinate finish, faceplate and cable route.

No circuits, loads, protective devices or concealed routes have been designed in this set. Electrical trade must develop these against the actual installation.

SOUTH INTERIOR ELEVATION

01 / SOUTH INTERIOR ELEVATION 1:30

View faces south. Horizontal screen direction: east to west. Window sizes are nominal; frame, reveal and glazing specifications require supplier coordination.

NORTH INTERIOR ELEVATION

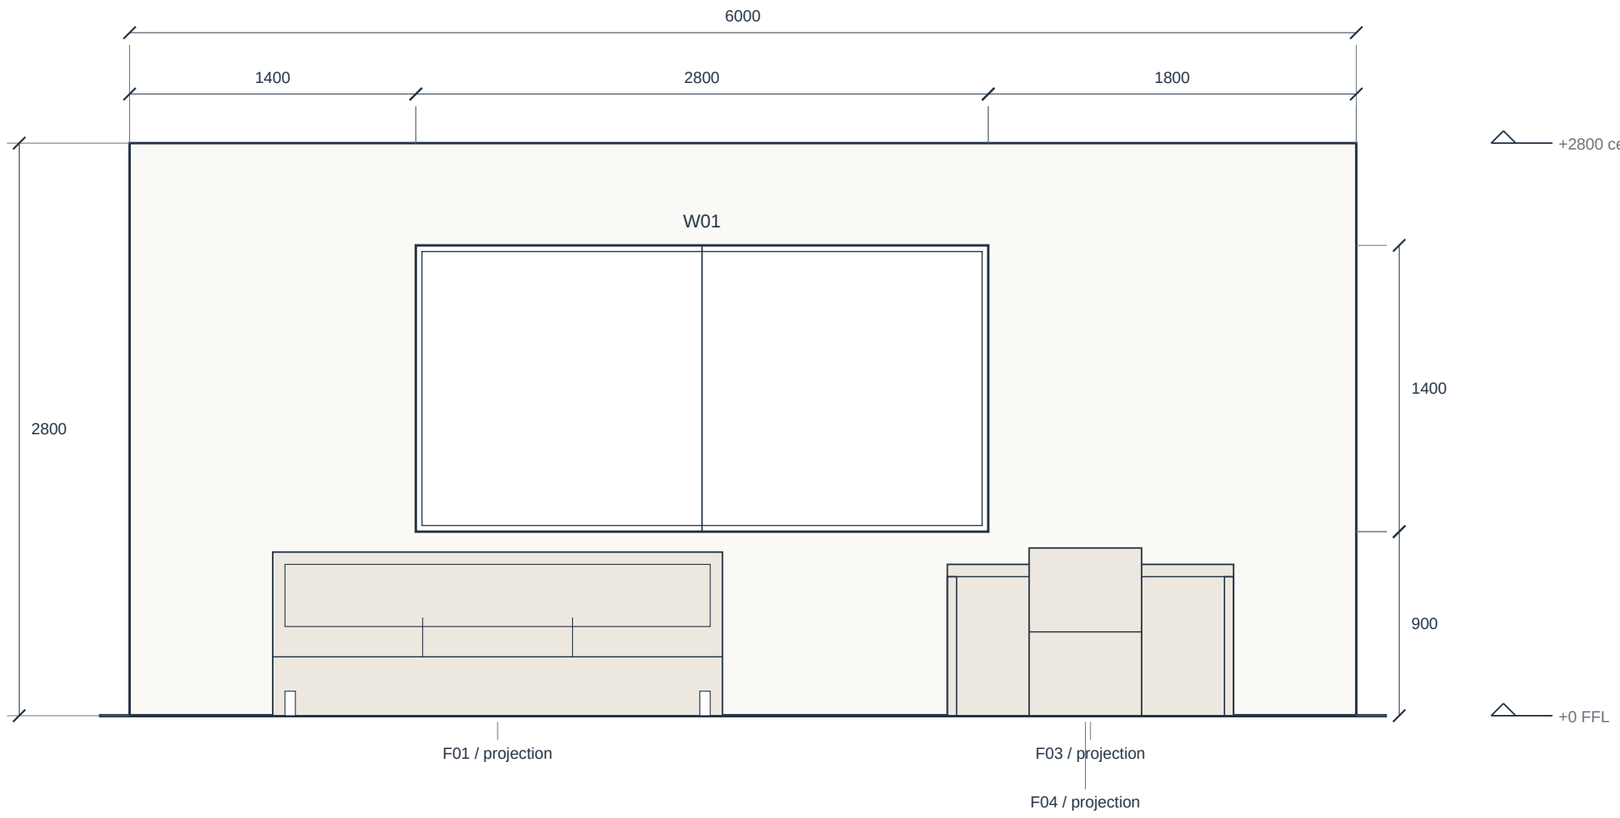

01 / NORTH INTERIOR ELEVATION 1:30

View faces north. Horizontal screen direction: west to east. Furniture projected in elevation; distance from wall remains as A101. Window sizes are nominal; frame, reveal and glazing specifications require supplier coordination.

F05 SIDEBOARD - GENERAL ARRANGEMENT

F05 / CUSTOM LOW SIDEBOARD

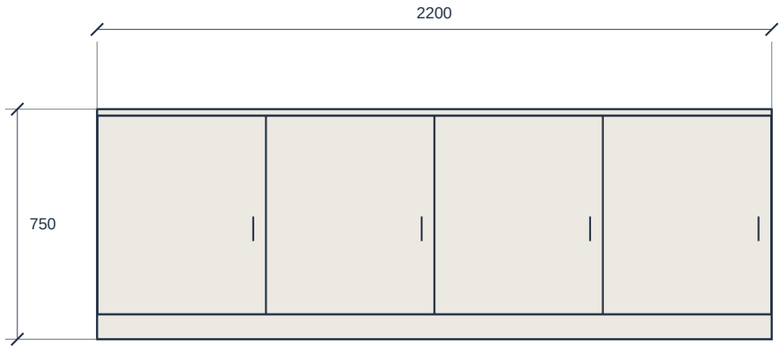

01 / FRONT ELEVATION 1:20

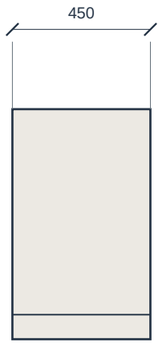

03 / SIDE 1:20

02 / PLAN 1:20

FINISH

Bauhaus: style-specific veneer or lacquer; verify finish/sample. Grain direction, edge treatment and sheen require an approved physical sample.

CONSTRUCTION INTENT

Overall W 2200 / D 450 / H 750.

4 bays, clear width 527.5 each between 18 mm dividers.

4 overlay leaves: 546.25 wide each; 3 mm perimeter/inter-leaf design gaps.

Depth stack: 18 door + 3 gap + 429 body = 450.

Body internal depth: 429 - 9 back = 420.

Door height 644 is provisional: top +727 / bottom +83. Select hinges before overlay/drilling release.

Section, shelf datum and unresolved fixing interfaces: J401. Finish sample: S001.

F05 CASEWORK - SECTION & INTERFACES

01 / VERTICAL DEPTH SECTION 1:5

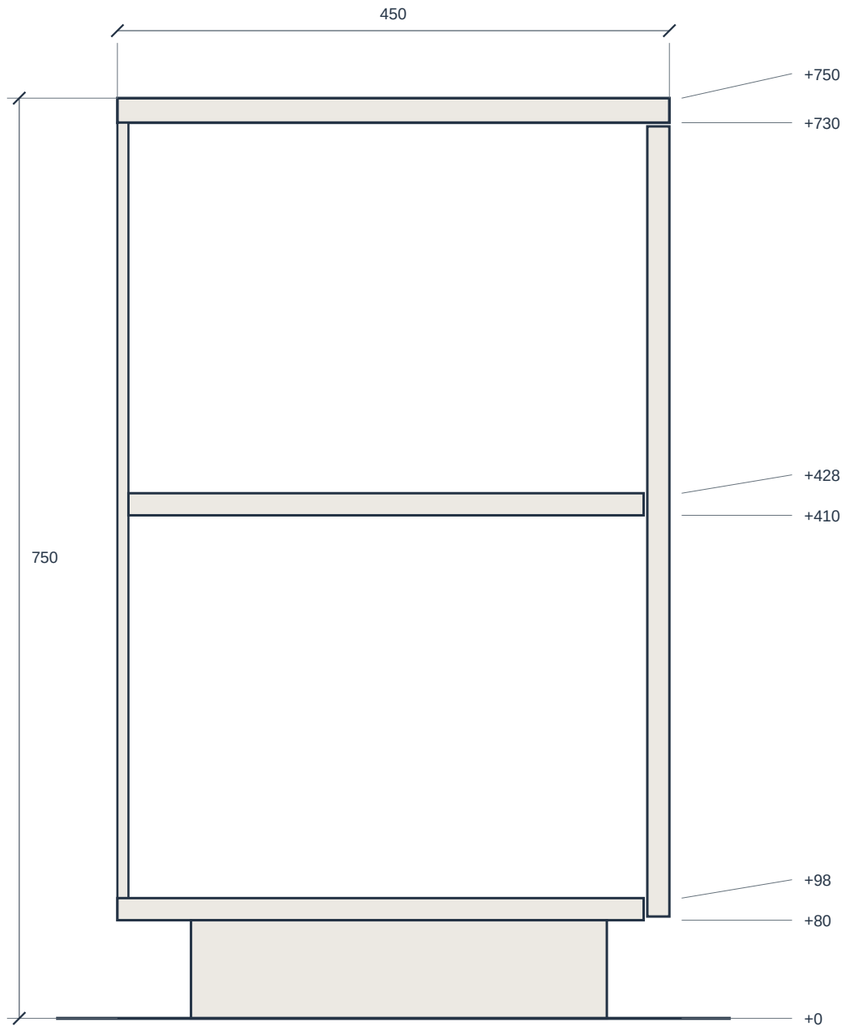

Rear / wall side

Front / door side

02 / CARCASS WIDTH STACK

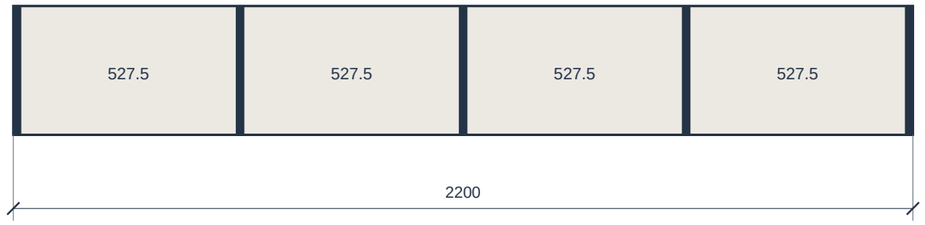

4 x 527.5 clear + 5 x 18 panels = 2200

Width diagram 1:15; written dimensions govern.

A / TOP 20 mm. Underside +730. Edge/overhang requires sample approval.

B / SHELF 18 mm. Top +428; bottom +410. Clear below 312 / above 302.

C / BASE 18 mm over 80 mm plinth. Plinth setback shown as design intent; leveling method unresolved.

D / BACK 9 mm, full-back depth concept. Joint/rebate and rear service penetrations unresolved.

E / FRONT 18 mm + 3 mm front gap. No hinge cups, screw pattern or opening angle selected.

F / WALL FIXING: confirm substrate, anchorage and loading. No fixing capacity or hardware approval is asserted.

SCHEDULES, FINISHES & OPEN DECISIONS

FURNITURE & OPENINGS

ID	ITEM	W x D x H / mm
F01	亞麻沙發 / Linen sofa	2200 x 900 x 800
F02	茶几 / Coffee table	1100 x 650 x 400
F03	書桌 / Work desk	1400 x 700 x 740
F04	書椅 / Desk chair	550 x 550 x 820
F05	訂製矮櫃 / Custom low sideboard	2200 x 450 x 750

ID	WALL / OFFSET	W x H / SILL
D01	south / 700	900 x 2100 / 0
W01	north / 1400	2800 x 1400 / 900
W02	east / 2600	1400 x 1400 / 900

FINISH INTENT / BAUHAUS

- WALL / #eeeae0
- WOOD / #212325
- UPHOLSTERY / #292b2e
- ACCENT / #b6342e
- METAL / #bfc5c7
- RUG / #e2dcca

DECISIONS BEFORE TRADE RELEASE

I01 Site survey: verify room, wall build-up, all openings and finished datums.

I02 Door supplier: confirm handing, frame, actual leaf and clear opening; check use and circulation.

I03 Electrical trade: develop circuiting, loads, protection, routes and mounting details for proposed points.

I04 Joiner: select hinges, overlays, door heights, drilling, shelf supports and joints before shop drawings.

I05 Site/joiner: establish wall substrate, anchors, load criteria, plinth leveling and restraints.

I06 Designer/client: approve veneer/lacquer, grain, edge samples, sheen and all selected fixtures.

Evidence: shared project.json + joinery.json; manifest includes source and output SHA-256 hashes. No surveyed or engineer-approved measurements.