# DRAWING REGISTER & DESIGN BASIS

## A ROOM, FROM INTENT TO BUILDABLE QUESTIONS.

A coordinated design-development set: shared geometry, dimensioned plans, interior elevations and casework interfaces. This study makes design decisions visible before detailed trade coordination.

| SHEET | DELIVERABLE | SCALE |
|---|---|---|
| G000 | Drawing register & design basis | NTS |
| A101 | Dimensioned furniture plan | 1:40 |
| A102 | Lighting & power coordination | 1:40 |
| A201 | South interior elevation | 1:30 |
| A202 | North interior elevation | 1:30 |
| J301 | F05 sideboard - general arrangement | 1:20 |
| J401 | F05 casework - section & interfaces | 1:5 |
| S001 | Schedules, finishes & open decisions | NTS |

### ISSUE BASIS / S01

Internal room 6000 x 4800 x 2800 mm.

Wall thickness 150 mm is an assumed envelope.

All opening sizes and locations are design assumptions; survey before setting out.

Finish study: Mid-century Modern. Geometry is common to all style variants.

Elevation arrows reference interior views: south is east-left, north is west-left.

Door hinge and inward swing are proposed. Nominal 900 leaf is not a certified clear opening.

Trade release requires the specific decisions in S001 and hardware review in J401.

### COORDINATION WORKFLOW

01 CONFIRM

Survey / dimensions

02 COORDINATE

Trades / equipment

03 DETAIL

Hardware / interfaces

04 RELEASE

Local professional review

# DIMENSIONED FURNITURE PLAN

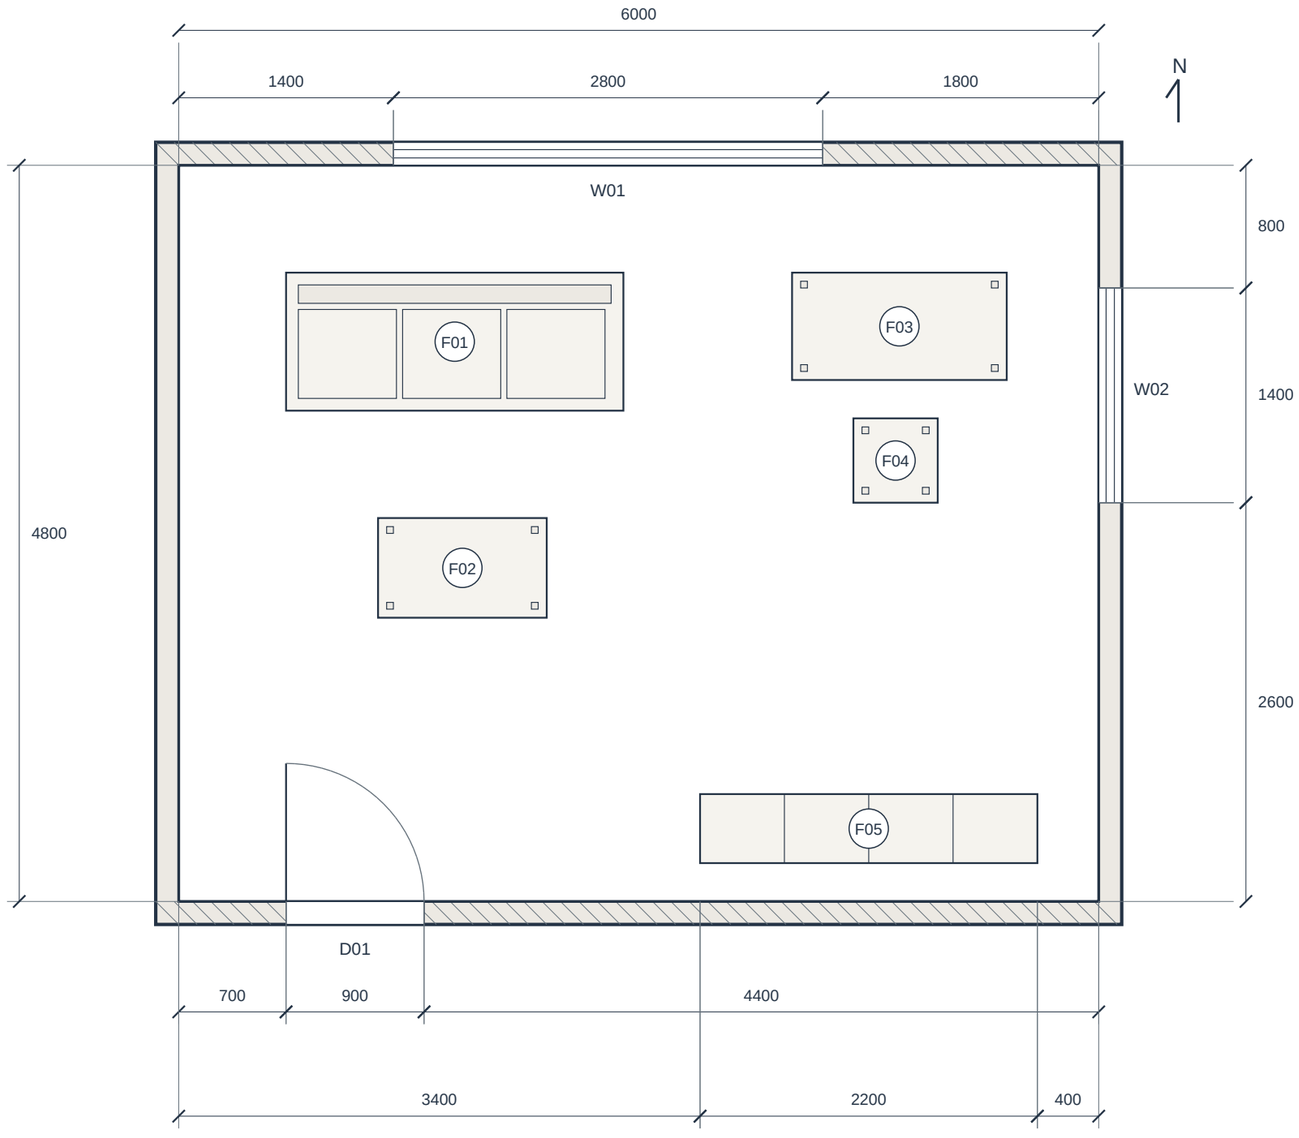


01 / PLAN 1:40 origin: internal SW corner; north up

Key: heavy line = cut wall; fine line = furniture; dashed arc = proposed door swing.

## LAYOUT / SETTING-OUT

| ID | WIDTH x DEPTH x HEIGHT |
|---|---|
| F01 | 2200 x 900 x 800 |
| F02 | 1100 x 650 x 400 |
| F03 | 1400 x 700 x 740 |
| F04 | 550 x 550 x 820 |
| F05 | 2200 x 450 x 750 |

F01 Linen sofa

SW origin: X 700 / Y 3200

F02 Coffee table

SW origin: X 1300 / Y 1850

F03 Work desk

SW origin: X 4000 / Y 3400

F04 Desk chair

SW origin: X 4400 / Y 2600

F05 Custom low sideboard

SW origin: X 3400 / Y 250

Furniture outlines are nominal envelopes. F05 is developed on J301/J401. No egress, accessibility or operational clearance approval is implied.

# LIGHTING & POWER COORDINATION

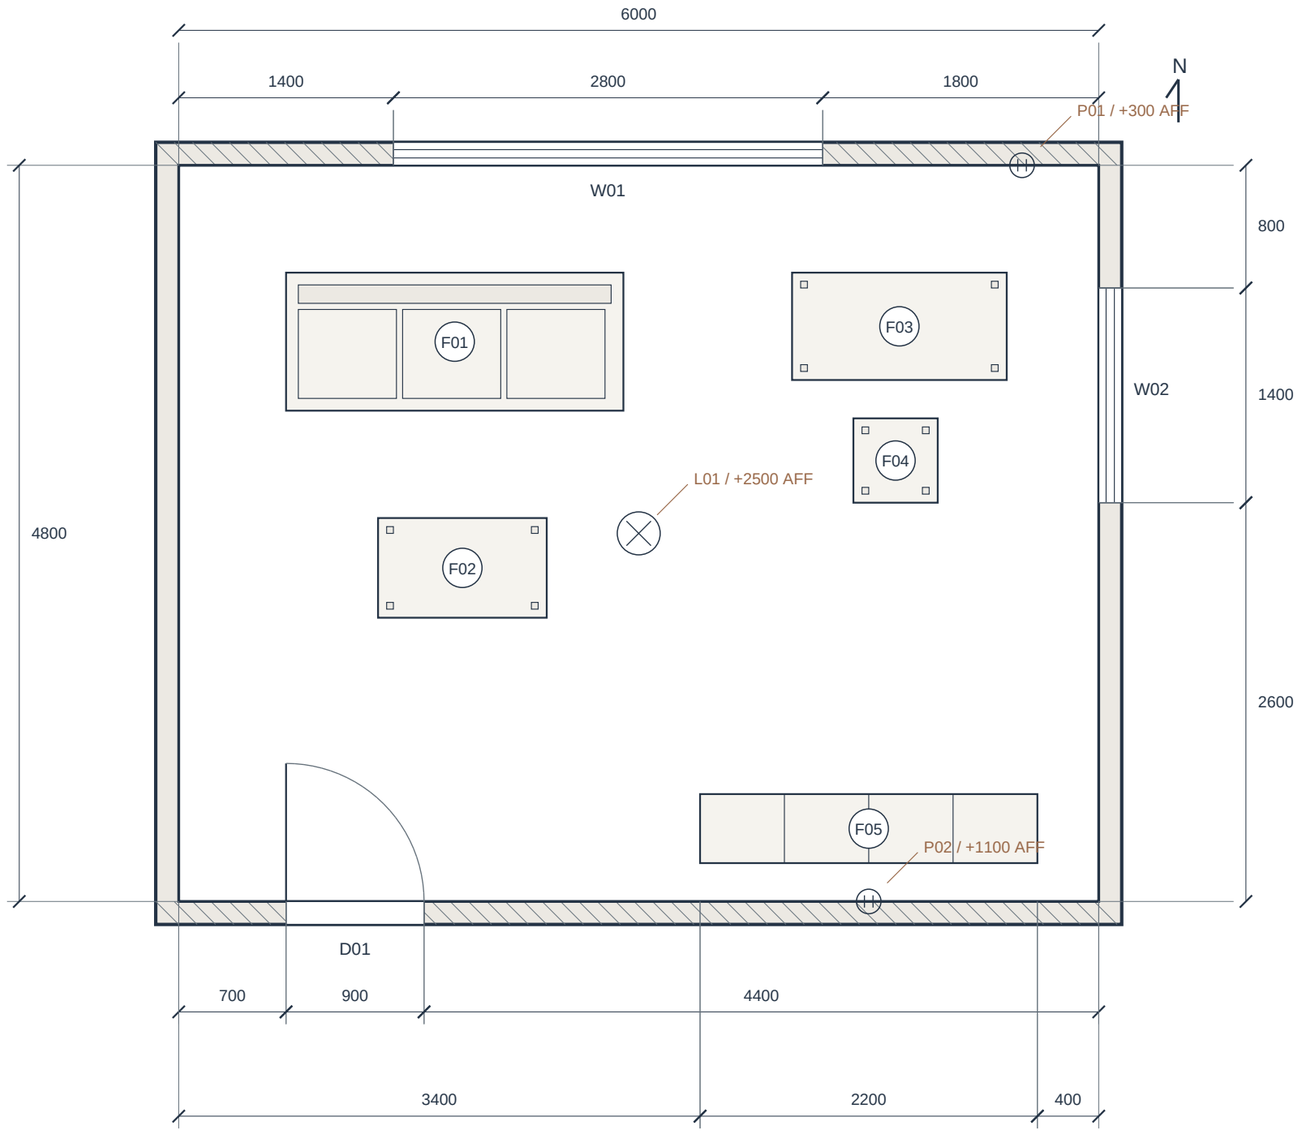


01 / PLAN 1:40 origin: internal SW corner; north up

## SERVICE POINT PROPOSAL

| ID | X / Y | AFF |
|---|---|---|
| L01 | 3000 / 2400 | 2500 |
| P01 | 5500 / 4800 | 300 |
| P02 | 4500 / 0 | 1100 |

AFF = above finished floor. XY positions reference inside SW corner.

L01: pendant design position. Ceiling anchor and suspension require product/substrate selection.

P01: desk power proposal at north wall; confirm plugs, cable paths and equipment access.

P02: power proposal above F05; coordinate finish, faceplate and cable route.

No circuits, loads, protective devices or concealed routes have been designed in this set. Electrical trade must develop these against the actual installation.

# SOUTH INTERIOR ELEVATION

## 01 / SOUTH INTERIOR ELEVATION 1:30

View faces south. Horizontal screen direction: east to west. Window sizes are nominal; frame, reveal and glazing specifications require supplier coordination.

# NORTH INTERIOR ELEVATION

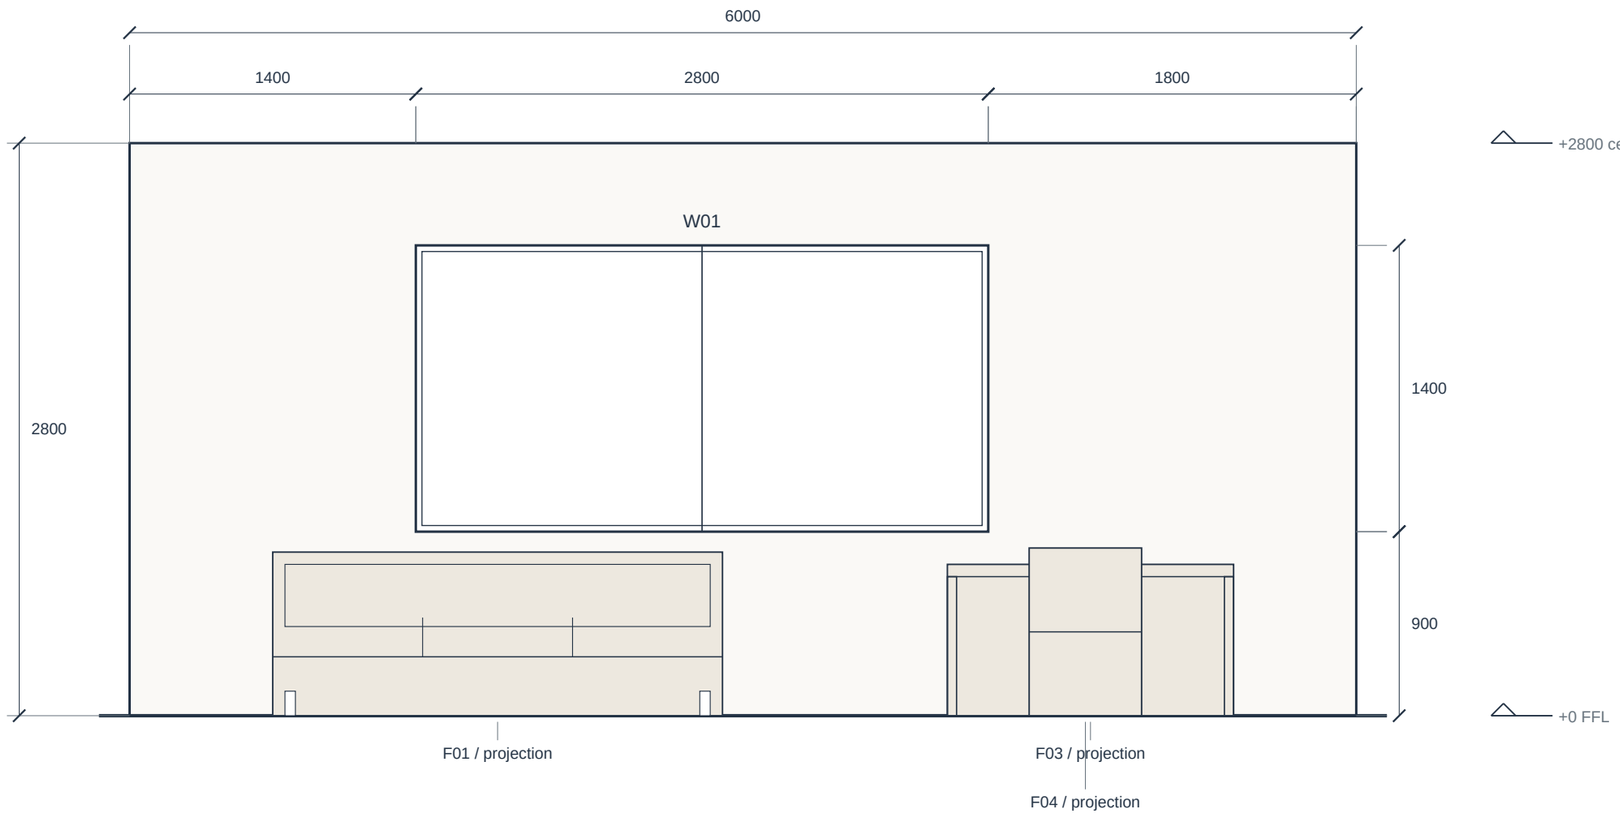


## 01 / NORTH INTERIOR ELEVATION 1:30

View faces north. Horizontal screen direction: west to east. Furniture projected in elevation; distance from wall remains as A101. Window sizes are nominal; frame, reveal and glazing specifications require supplier coordination.

# F05 SIDEBOARD - GENERAL ARRANGEMENT

## F05 / CUSTOM LOW SIDEBOARD

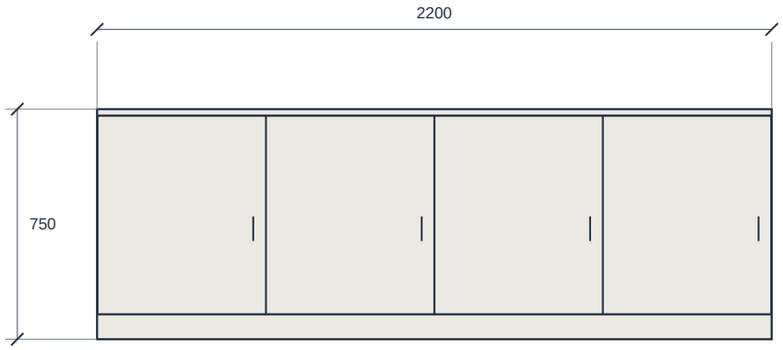


01 / FRONT ELEVATION 1:20

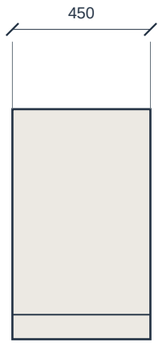


03 / SIDE 1:20

02 / PLAN 1:20

## FINISH

Mid-century Modern: style-specific veneer or lacquer; verify finish/sample. Grain direction, edge treatment and sheen require an approved physical sample.

## CONSTRUCTION INTENT

Overall W 2200 / D 450 / H 750.

4 bays, clear width 527.5 each between 18 mm dividers.

4 overlay leaves: 546.25 wide each; 3 mm perimeter/inter-leaf design gaps.

Depth stack: 18 door + 3 gap + 429 body = 450.

Body internal depth: 429 - 9 back = 420.

Door height 644 is provisional: top +727 / bottom +83. Select hinges before overlay/drilling release.

Section, shelf datum and unresolved fixing interfaces: J401. Finish sample: S001.

# F05 CASEWORK - SECTION & INTERFACES

## 01 / VERTICAL DEPTH SECTION 1:5

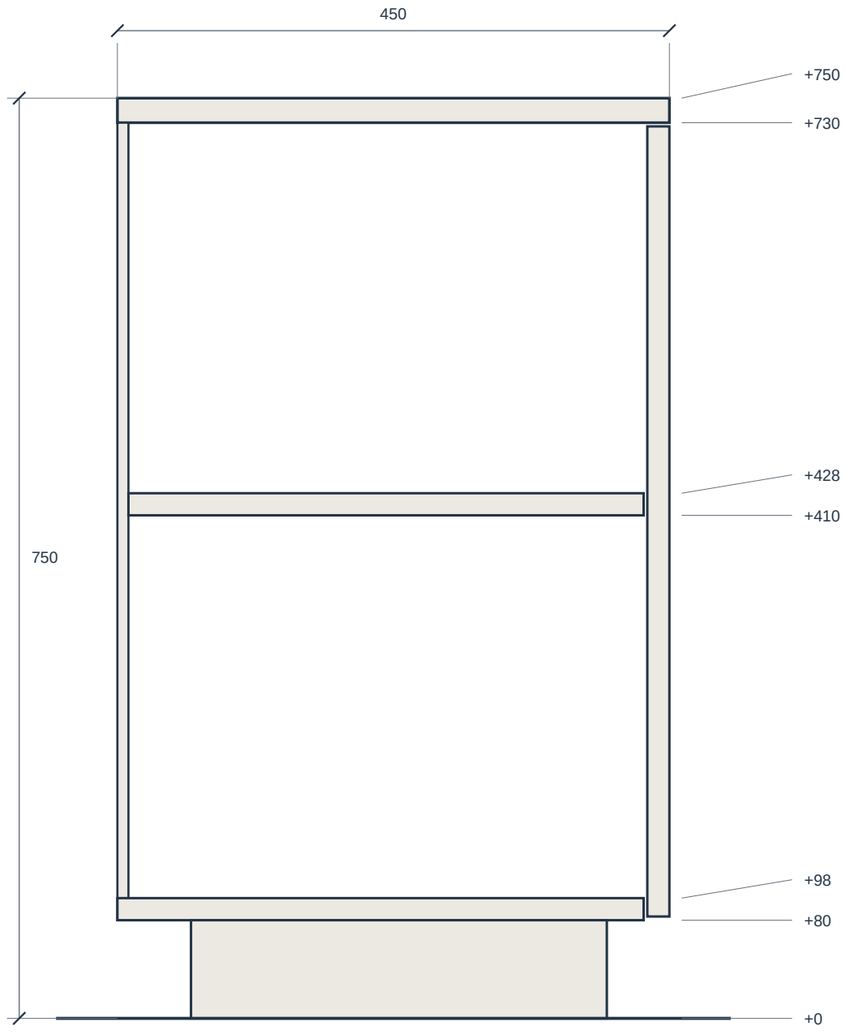


Rear / wall side

Front / door side

## 02 / CARCASS WIDTH STACK

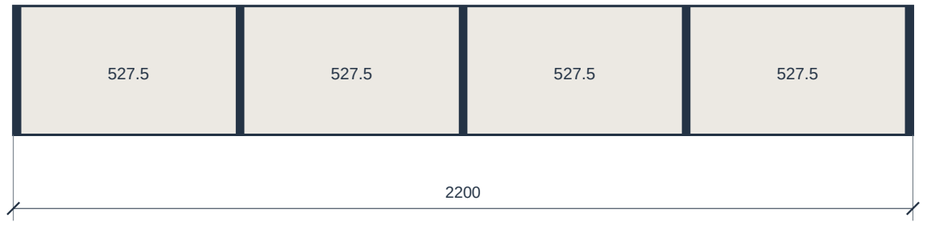


4 x 527.5 clear + 5 x 18 panels = 2200

Width diagram 1:15; written dimensions govern.

A / TOP 20 mm. Underside +730. Edge/overhang requires sample approval.

B / SHELF 18 mm. Top +428; bottom +410. Clear below 312 / above 302.

C / BASE 18 mm over 80 mm plinth. Plinth setback shown as design intent; leveling method unresolved.

D / BACK 9 mm, full-back depth concept. Joint/rebate and rear service penetrations unresolved.

E / FRONT 18 mm + 3 mm front gap. No hinge cups, screw pattern or opening angle selected.

F / WALL FIXING: confirm substrate, anchorage and loading. No fixing capacity or hardware approval is asserted.

# SCHEDULES, FINISHES & OPEN DECISIONS

## FURNITURE & OPENINGS

| ID | ITEM | W x D x H / mm |
|---|---|---|
| F01 | Linen sofa | 2200 x 900 x 800 |
| F02 | Coffee table | 1100 x 650 x 400 |
| F03 | Work desk | 1400 x 700 x 740 |
| F04 | Desk chair | 550 x 550 x 820 |
| F05 | Custom low sideboard | 2200 x 450 x 750 |

| ID | WALL / OFFSET | W x H / SILL |
|---|---|---|
| D01 | south / 700 | 900 x 2100 / 0 |
| W01 | north / 1400 | 2800 x 1400 / 900 |
| W02 | east / 2600 | 1400 x 1400 / 900 |

## FINISH INTENT / MID-CENTURY MODERN

- WALL / #ebe3d1
- WOOD / #6f4028
- UPHOLSTERY / #60705a
- ACCENT / #bd6c38
- METAL / #b49258
- RUG / #c9b894

## DECISIONS BEFORE TRADE RELEASE

I01 Site survey: verify room, wall build-up, all openings and finished datums.

I02 Door supplier: confirm handing, frame, actual leaf and clear opening; check use and circulation.

I03 Electrical trade: develop circuiting, loads, protection, routes and mounting details for proposed points.

I04 Joiner: select hinges, overlays, door heights, drilling, shelf supports and joints before shop drawings.

I05 Site/joiner: establish wall substrate, anchors, load criteria, plinth leveling and restraints.

I06 Designer/client: approve veneer/lacquer, grain, edge samples, sheen and all selected fixtures.

Evidence: shared project.json + joinery.json; manifest includes source and output SHA-256 hashes. No surveyed or engineer-approved measurements.